

Welcome! to our world

superiority  
RM V550GO! QUALITY CRUSHING  
NEW APPLICATIONS THROUGH FLEXIBILITY AND MOBILITY.



V550GO!



### 100% mobility

The transport as well the start up and dismounting are fast and easy. The machine is ready for operation on the job site within minutes.



### RM CS4800 Screen

Adding an RM CS4800 screen makes a compact and powerful sand and gravel plant for 3 defined fractions.

# highlights

## THE TECHNICAL HIGHLIGHTS

The RM V550GO! combines the technology of cone and rotor type crushers with the advantages of the RM GO! principle to achieve an unsurpassable level of pulverisation and maximum flexibility. The machine can be equipped with proven RM modules at any time. By the use of a mounted RM MS100GO! and the compact RM CS4800 screen 3 defined particle sizes can be produced and the oversize material is fed back into the crusher. This creates a compact, fully mobile but powerful sand and gravel plant.



### Innovative drive concept

Thanks to the typical RM drive concept fuel consumption is kept very low, thus reducing running costs.



### Safe ground-based service

The engine which is mounted beneath the vibro feeder can be accessed from three sides and thus enables you to carry out maintenance and servicing safely and efficiently from the ground.



### RM RFB550GO! refeeding belt

The optional RM RFB550GO! refeeding belt sends the oversize material back into the vibro feeder and returns it to the crusher. This saves additional working steps and increases productivity as a result.





#### Belt feeder with feeding hopper

The low loading edge and the feeding hopper volume of 5.5 m<sup>3</sup> support the feeding process. The variable speed of the belt feeder gives you maximum throughput performance.




#### Metal detector

The efficient metal detector prevents metal from going into the crushing chamber.

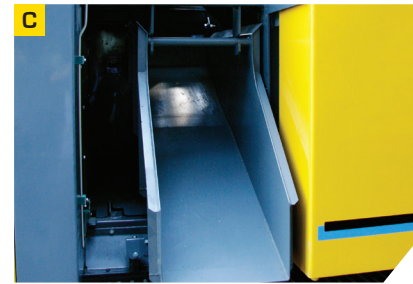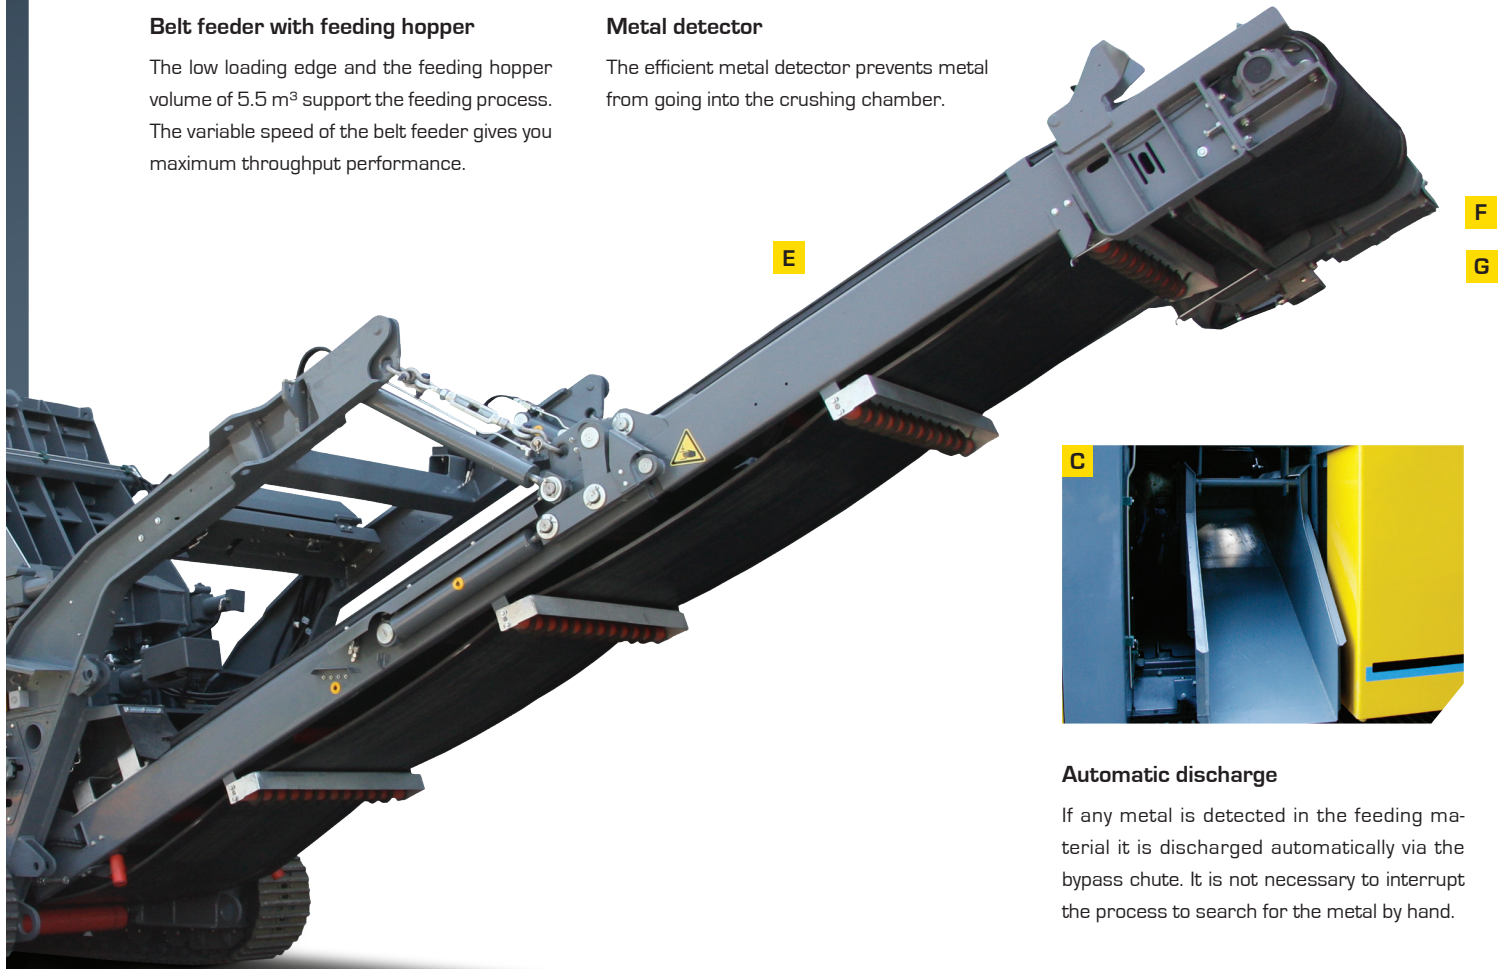

#### Automatic discharge

If any metal is detected in the feeding material it is discharged automatically via the bypass chute. It is not necessary to interrupt the process to search for the metal by hand.

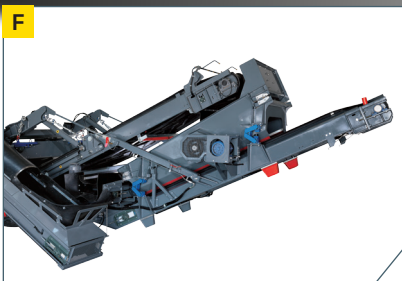

#### RM MS100GO! mesh deck screen

The RM MS100GO! is mounted on the RM V550GO! using a subframe and stands out through high precision when separating the screened materials. This means that you can produce high-quality building materials. Typical applications can be found in the natural rock industry.



#### Discharge conveyor

The discharge belt stands out through high reliability and a long service life. Servicing jobs such as removal, replacement or adjustments are carried out easily and quickly. The maximum discharge height of 3,340 mm adds to the efficient operation of the machine.



#### Crusher

The high-end crushing technology of the RM V550GO! ensures optimum results for a wide range of applications.

# fields of annihilation

**OUTSTANDING CRUSHING PERFORMANCE COMBINED  
WITH MAXIMUM FLEXIBILITY!**

## POST CRUSHING GRANITE



Feed material granite  
up to 200 mm edge length



Processing



Final grain 0 - 32 mm

## POST CRUSHING BASALT



Feed material basalt  
70 - 200 mm



Processing



Final grain 0 - 63 mm

## REJECT GRAVEL



Feed material  
bis 400 mm edge length




Processing



Final grain 0 - 32 mm

## EXCESS GRAIN

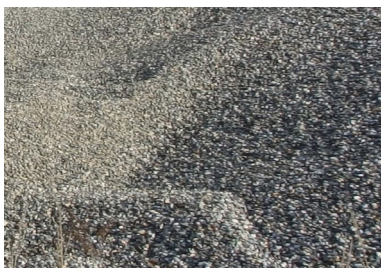

Feed material 8 - 16 mm



Processing











Final grain 0 - 4 mm

## NEW APPLICATIONS THANKS TO SUPERIOR CRUSHING TECHNOLOGY

Thanks to the high size reduction ratio large feeding material can be processed efficiently and a crushing step can often be eliminated.

Oversize material can be processed to usable fractions and based on the versatile settings of the crusher an adaptation of the grading curve in the end product is possible.

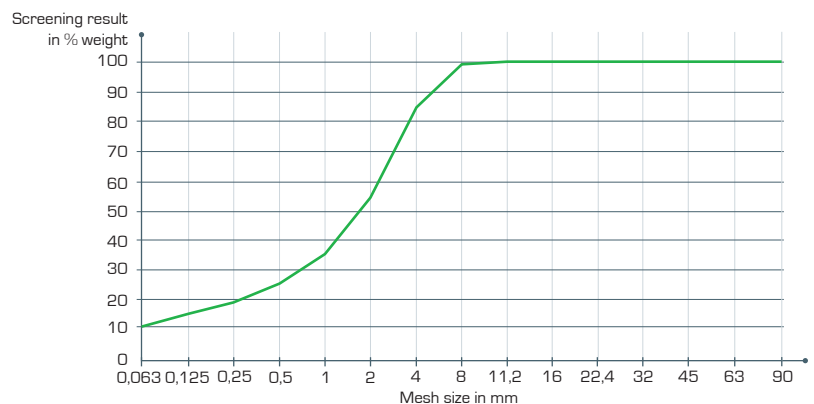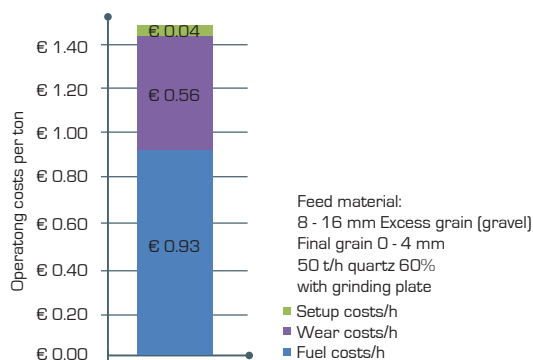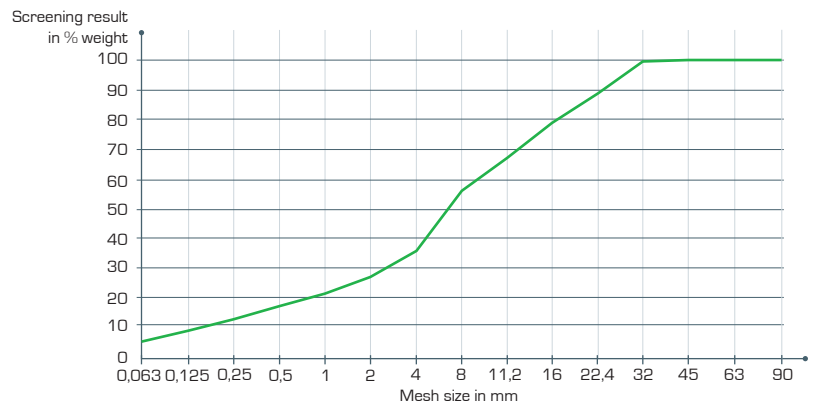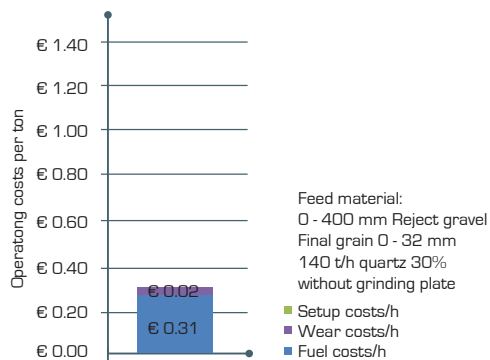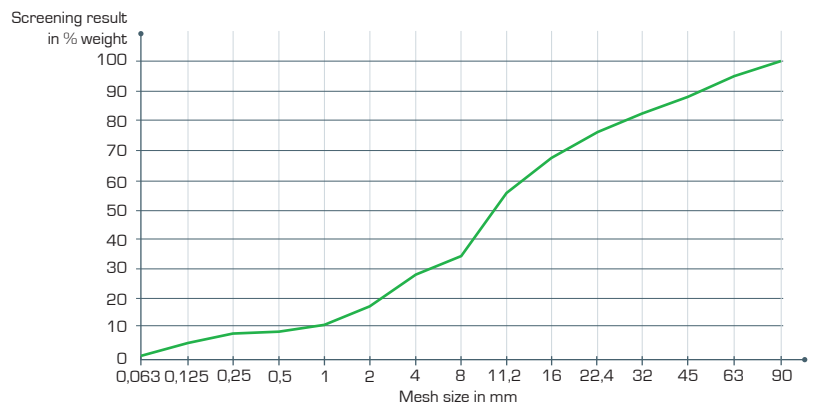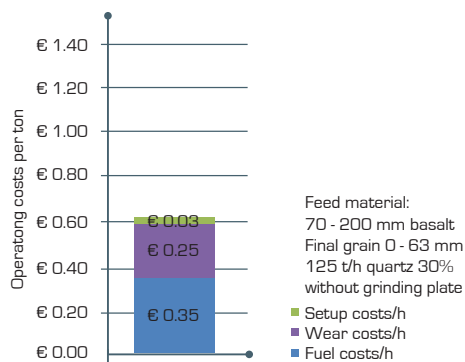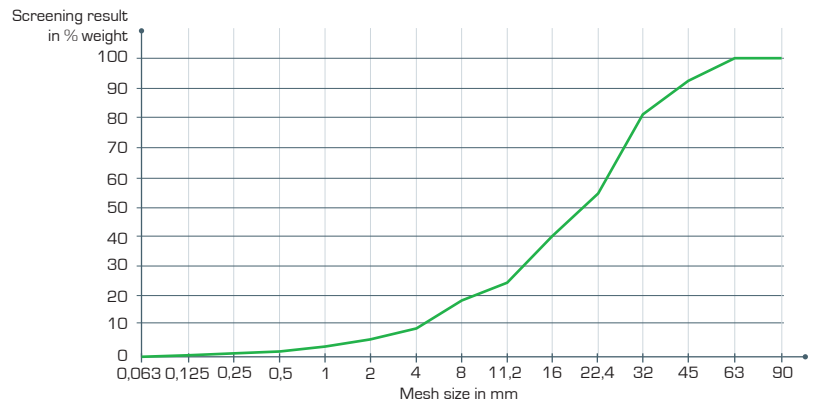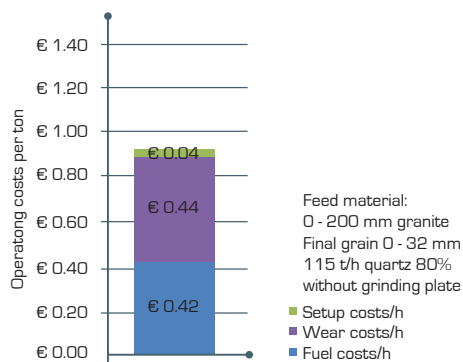


## RM V550GO! – MOBILE ROTOR IMPACT CRUSHER

<b>Output</b>	Up to 200 t/h, depending on material
<b>Feed material</b>	Natural stone – hard stone can be fed without any restriction if you observe the maximum feeding size; any metal has to be removed without exception
<b>Feed material size</b>	Edge length max. 400 mm
<b>Einlauföffnung</b>	950 x 480 mm
<b>Brechereinheit</b>	crusher with 2+2 or 4 hammers, rotor speed adjustable between 39.5–48 m/s, depending on the feeding material and the required end fraction
<b>Operation</b>	One operator using radio control for crushing and manoeuvring operations
<b>Radio control</b>	Feeding belt start / stop Main discharge conveyor start / stop Machine stop Activate crawler unit Crawler control via joysticks 2 crawler speeds Radio control on / off and horn
<b>Feeding unit</b>	5.5 m³ belt feeder with 11 kW gearbox motor Loading height 3,500 mm, effective feeding length and width: 2,900 x 3,500 mm Variable belt speed Integrated metal detector to protect the crusher from undesired metal feed
<b>Main discharge belt</b>	Folding conveyor 1,000 mm wide, folds into transport position hydraulically Discharge height 3,350 mm
<b>Power unit</b>	John Deere Diesel engine, 6-cylinder, 280 kW at 2,000 rpm, 3-phase synchronous generator 80kVA 400 V, electrical outlets 230 V and 400 V for external drives up to 15kVA
<b>Transport system</b>	Crawler gear, 2 speeds
<b>Weight</b>	33,000 kg
<b>End product</b>	Cubic material, grading curve and size of end-fraction adjustable, high sand and gravel value
<b>Options</b>	Dust suppression using water spray inside crusher and at outlet and belts Diesel filling pump Cable remote control Central lubrication system
<b>Add-on equipment</b>	RM MS100GO! mobile single-deck screenbox, screen area 2.8 x 1.3 m with two belts, weight 2,800 kg, for precise screen separation RM RFBV550GO! oversize material refeeding belt for closed material loop, transport on RM V550GO!, weight 1,400 kg


# DIMENSIONS

## RM V550GO!

### WORKING POSITION

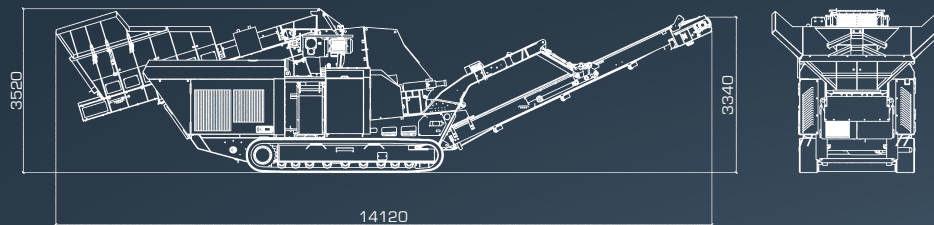


### TRANSPORT POSITION

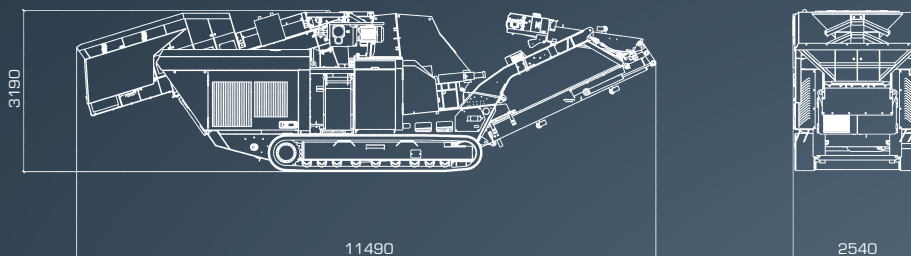


## RM V550GO! + RM MS100GO! + RM RFBV550GO!

### WORKING POSITION

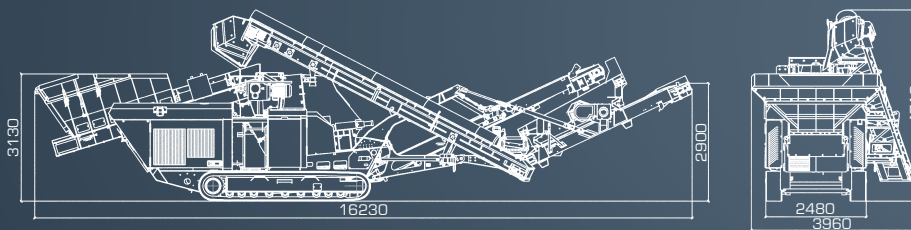


## RM V550GO! + RM MS100GO!

### TRANSPORT POSITION

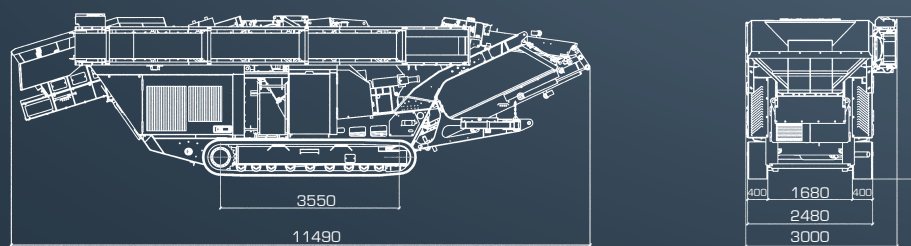

## RM V550GO! + RM MS100GO! + RM RFBV550GO! + RM CS4800

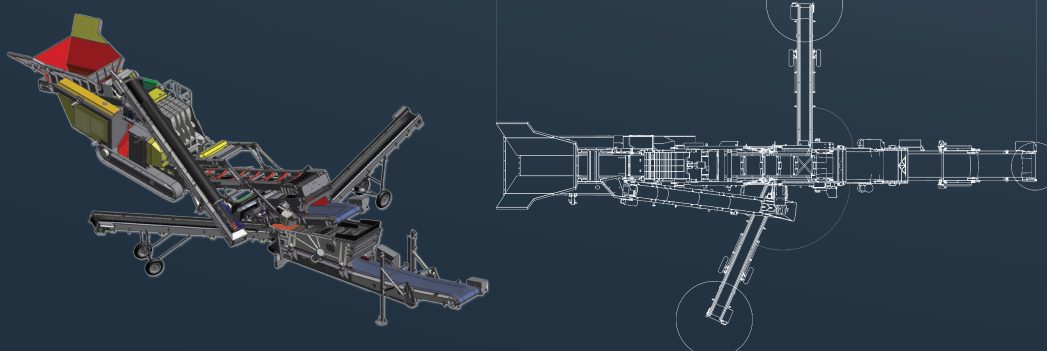

**Welcome!** to our world



**RUBBLE MASTER HMH GMBH**  
IM SÜDPARK 196, AT 4030 LINZ, AUSTRIA  
TEL: +43 732 73 71 17 - 360  
FAX: +43 732 73 71 17 - 101  
E-MAIL: SALES@RUBBLEMASTER.COM

[WWW.RUBBLEMASTER.COM](http://WWW.RUBBLEMASTER.COM)